

ActiveProLearn
Enseignement digital

ENT Installer: Cohort Synchronisation

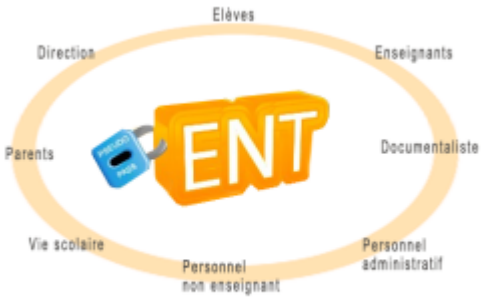


Configuration screen

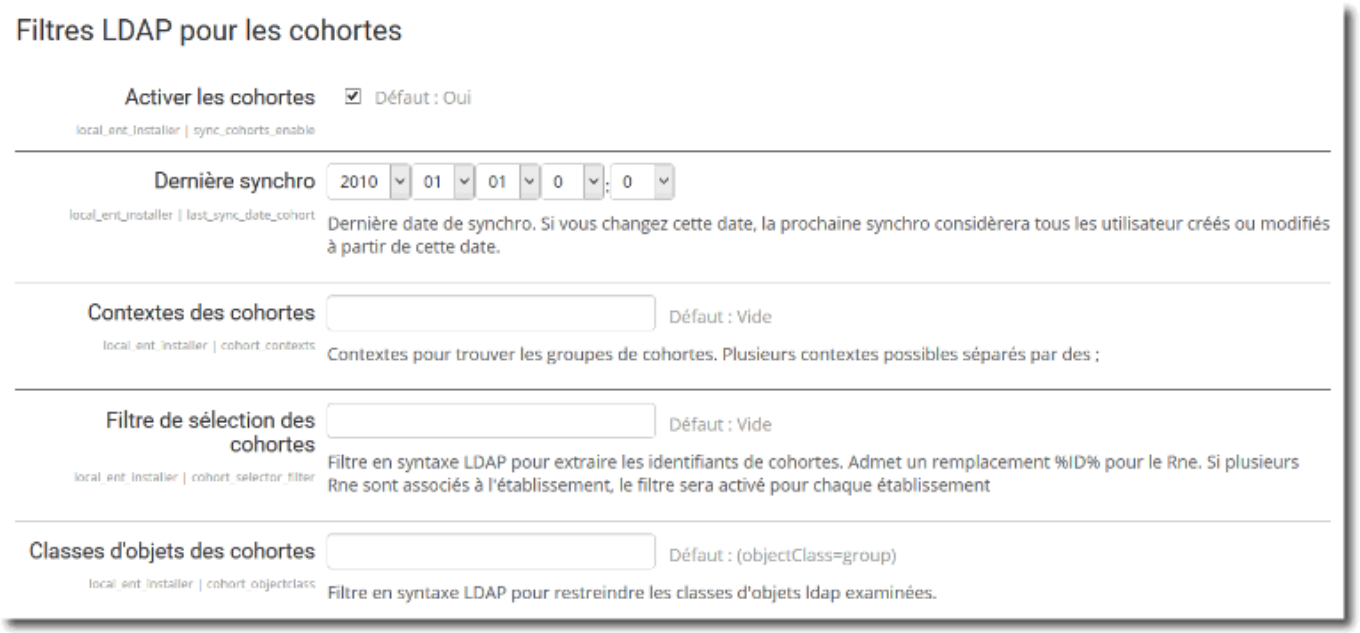

- **Enable cohorts:** Specific switch to enable cohort synchronisation. If this box is not ticked, no synchronisation will be done on cohorts by any action whatsoever (CLI, cron, or manual)
- **Last sync:** The date of the last synchronisation. It serves as the reference for partial synchronisations.
- **Cohort contexts:** The context(s) in which the LDAP groups representing cohorts can be found. Several contexts can be explored if separated by a comma. Sub-contexts will be explored according to the settings of the LDAP authentication module.
- **Cohort selection filter:** An LDAP filter to select the entries relevant for creating cohorts.

These entries are considered from the root context above. The expression is a standard LDAP filter on attributes with boolean operators (&, |, !, ^, etc.).

- **Cohort object classes:** An LDAP filter giving the LDAP object type for cohorts, in general (ObjectClass=group).

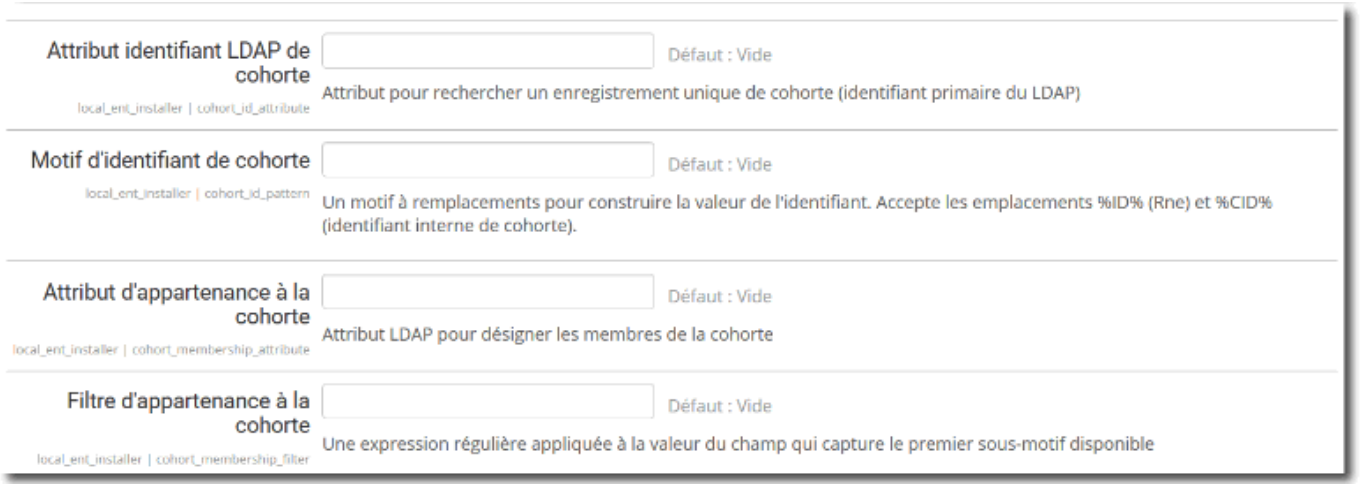


- **Cohort LDAP identifier attribute:**The name of the LDAP attribute that contains the cohort identifier (idnumber).
- **Cohort identifier pattern:** A character string accepting the placeholders %ID% (for the institution's RNE) and %CID% to insert the value above.
- **Cohort membership attribute:**Multivalued attribute carrying the members of the cohort, usually “member”.
- **Cohort membership filter:** A regular expression with at least one sub-pattern to extract the cohort identifier value. By default the catch-all pattern '(.*)' will be used.



- **Cohort name attribute:** Multivalued attribute carrying the name of the cohort.
- **Cohort name filter:** A regular expression with at least one sub-pattern to extract the name. By default the catch-all pattern '(.*)' will be used.
- **Cohort identification number attribute:**Multivalued attribute carrying the cohort's identification number (idnumber).

- **Identification number filter:** A regular expression with at least one sub-pattern to extract the identification number value. By default the catch-all pattern '(.*)' will be used.

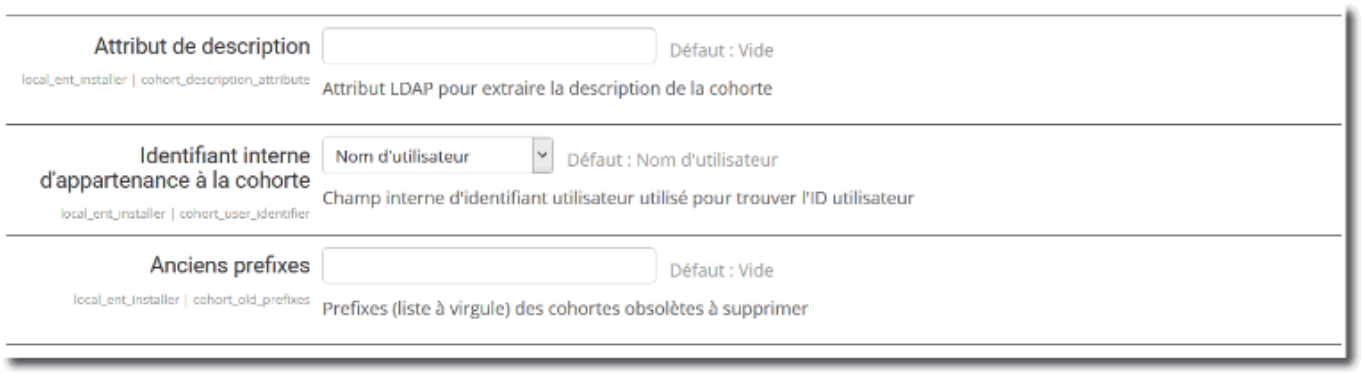

- **Description attribute:** This field is carried over in full, without filtering or processing, as the cohort description.
- **Internal cohort membership identification:** The Moodle field that is matched with the membership identifier.
- **Old prefixes:** If this field is filled in, then the cohorts whose identifier matches the prefix will be deleted from Moodle.

Back to the technical guide index - Back to the component index- Back to the plugin index- Back to the catalog

From:
https://docsen.activeprolearn.com/ - **Documentation Moodle ActiveProLearn**

Permanent link:
https://docsen.activeprolearn.com/doku.php?id=local:entinstaller:entity:cohorts

Last update: **2026/11/13 21:59**