



## Local Shop : General configuration

### Introduction

The shop must be generally configured with seller information in order to operate.

Path: Site administration/plugins/local plugins/shop

The configuration involves four set sections and a certain amount of variable sections depending on the number of payment plug-ins installed.

### Global settings

- **Default front office navigation:** This parameter indicates the sequencing order of front office screens. The shop stores all pre-purchase data during a session. This data can be in a different order according to the business or the wishes of the operator.

⚠ Be careful: navigation sequence implicates all front office screens. Some combinations can generate shop malfunctions, such as, for example, attempting to display an invoice before a payment. There are consequently certain rules that need to be followed, notably:

- Differentiate between “pre-payment” screens and “after payment” screens
- Provide the invoice after payment

#### **Pre-payment steps:**

- **shop** : establish the cart
- **purchaserequ** : collect product parameters
- **users** : enter information on seats
- **customer** : collect customer information / existing customer login
- **order** : order summary

#### **Payment steps (or steps after payment):**


- **payment** : payment or redirect to a payment interface
- **produce** : digital production of purchased products
- **invoice** : presentation of invoice or pro forma invoice
- **Default currency** : Selects the currency given for the shop.

⚠ Note : The multi-currency shop operation is planned, but still requires some finalisation. (Utilisation de plusieurs devises dans la même instance de catalogue.)

- **Test mode** : Si ce mode est activé, alors toutes les interfaces de paiement activées le sont sur

les paramètres de bac à sable des différents partenaires de paiement. De plus l'usage de la phase de paiement est interdite aux personnes non connectées et non administrateur. Cependant, les transactions effectuées en mode test généreront des enregistrements effectifs de factures et de produits. Il peut être nécessaire de procéder à une réinitialisation des transactions avant la mise en production effective de la boutique.

- If this mode is enabled, then all payment interfaces are enabled based on the sandbox parameters of the different payment partners. Furthermore, persons who are not logged in or who are not administrators are prohibited from payment phase use. Transactions made in test mode however will generate actual records of invoices and products. Transactions might have to be reinitialised before the shop is actually in production.
- **Test lock override** : Si ce mode est activé, alors le verrouillage des achats en mode test est levé, pour aller au bout d'une transaction.
- **Max items** : Determine the max. size of list displays in the back office.
- **Hide products if not available** : Défaut : No. If enabled, non available products (for availability check reasons, but yet published for sale) will not be shown at all on front. If disabled, they still appear but shadowed and without the ordering button.

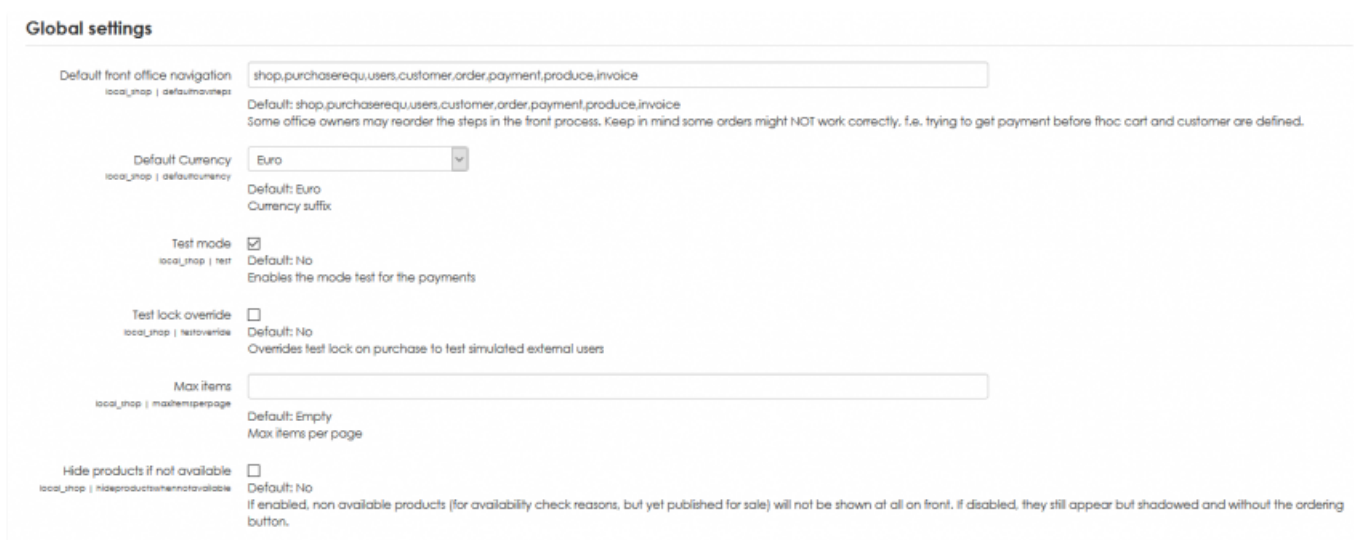

## Discount settings

The Moodle shop handles a three-tiered discount system. A discount can only be attributed by logged in users based on certain capabilities at system level.

The discount is applied to the order total and is triggered by a sales threshold. A customer can benefit from a more or less significant discount according to the level of discount they earn by right, but the trigger threshold remains unique. (You cannot tier up different automatic discounts according to cart amount).

To modulate prices according to local quantities with a product, view the settings for a single product. Only one discount threshold can be applied at a time (discounts are therefore not cumulative).

- **Discount threshold:** A threshold that triggers the effectivity of the discount. Users must have

**local/shop:discountagreed** capability to benefit from it.

- **Discount rate:** Is expressed as a % of total order amount. A discount rate applied on the overall amount. May be applied unconditionally if customer has the local/shop:discountagreed capability on
- **Second discount rate:** This rate is applied to logged in users : A discount rate applied when customer has the local/shop:seconddiscountagreed capability on You can, for example, create a site role with this capability and have this role attributed via a badge to identify preferred customers.
- **Third discount rate:** Likewise, a third discount rate can be triggered for **local/shop:thirddiscountagreed** capability.

#### Discount settings

Discount Threshold <small>local_shop   discountthreshold</small>	<input type="text" value="0"/>
Default: 0 A threshold that triggers the effectivity of the discount	
Discount Rate <small>local_shop   discountrate</small>	<input type="text" value="0"/>
Default: 0 A discount rate applied on the overall amount. May be applied unconditionally if customer has the local/shop:discountagreed capability on	
Discount Rate 2 <small>local_shop   discountrate2</small>	<input type="text" value="0"/>
Default: 0 A discount rate applied when customer has the local/shop:seconddiscountagreed capability on	
Discount Rate 3 <small>local_shop   discountrate3</small>	<input type="text" value="0"/>
Default: 0 A discount rate applied when customer has the local/shop:thirddiscountagreed capability on	

## Information about vendor's identity

- Seller name: Seller name displayed on screens.
- Seller address : physical adress.
- Seller zip code: Zip code displayed for the seller identity.
- Seller city : City of the merchant.
- Seller country: Country displayed.
- Seller email: Direct email.
- Mail adress support: Mail address of the sales customer support team.
- Phone support number: Phone number of the sales customer support team.

Lastly, accounting information is used to display any different data on documents produced (purchase orders, pro forma invoices, invoices, etc.)

- Seller Registrar ID: The official company registrar ID of the seller.
- Seller Billing address: The accountance location of the merchant.
- Seller Billing Zip Code: Zip code of the accountant service.
- Seller Billing city : City of accountance service.
- Seller Billing country: Country of accountant service.
- Seller Logo : the logo that will be printed on invoices and orders.

### Information about vendor's identity

Seller name <small>local_shop   sellername</small>	<input type="text" value="ActiveProLearn"/> Default: Empty The official name of the vendor
Seller Address (physical) <small>local_shop   selleraddress</small>	<input type="text" value="Rond Point Benjamin Franklin"/> Default: Empty The address (postal) of the merchant
Seller Zip Code <small>local_shop   sellerzip</small>	<input type="text" value="34000"/> Default: Empty Zip code for the seller identity
Seller City <small>local_shop   sellercity</small>	<input type="text" value="Montpellier"/> Default: Empty City of the merchant
Seller Country <small>local_shop   sellercountry</small>	<input type="text" value="France"/> Default: Empty Country of the merchant
Seller Email <small>local_shop   sellermail</small>	<input type="text" value="ventes@activeprolearn.com"/> Default: Empty Mail address of the merchant
Mail support address <small>local_shop   sellermailsupport</small>	<input type="text" value="support@activeprolearn.com"/> Default: Empty Mail address of the sales customer support team
Phone support number <small>local_shop   sellerphonesupport</small>	<input type="text"/> Default: Empty Phone number of the sales customer support team
Seller Registrar ID <small>local_shop   sellersiret</small>	<input type="text" value="Siret 801 675 299 00011"/> Default: Empty The official company registrar ID of the seller
Seller Billing Address <small>local_shop   sellerbillingaddress</small>	<input type="text" value="Rond Point Benjamin Franklin"/> Default: Empty The accountance location of the merchant
Seller Billing Zip Code <small>local_shop   sellerbillingzip</small>	<input type="text" value="34000"/> Default: Empty Zip code of the accountant service
Seller Billing City <small>local_shop   sellerbillingcity</small>	<input type="text" value="MONTPELLIER"/> Default: Empty City of accountance service
Seller Billing Country <small>local_shop   sellerbillingcountry</small>	<input type="text" value="FRANCE"/> Default: Empty Country of accountant service
Seller logo <small>local_shop   sellerlogo</small>	<div style="text-align: right; font-size: small;">Maximum size for new files: Unlimited, maximum attachments: 1</div> <div style="border: 1px solid #ccc; padding: 5px;"><div style="display: flex; justify-content: space-between; align-items: center;"><span>Files</span><span>📁 📄 🗑️</span></div><div style="text-align: center; margin: 10px 0;"> logo-APL-gd.png</div></div> <p>Default: Empty the logo that will be printed on invoices and orders</p>

## Settings related to payment plug-ins

Each installed payment plug-in can add a set of parameters dedicated to this plug-in functioning. Here

are some examples.

### Mercanet configuration option

The Mercanet interface is the interface used by BNP and banks in that same group.

The screenshot shows a configuration form titled "Mercanet configuration options". It contains the following fields:

- Mercanet Merchant ID**: A text input field. Below it, the text reads "local\_shop | mercanet\_merchant\_id", "Default: Empty", and "Merchant ID. Provided by Mercanet."
- Country code**: A dropdown menu currently set to "France". Below it, the text reads "local\_shop | mercanet\_country" and "Mercanet country".
- Currency code**: A dropdown menu currently set to "Euros". Below it, the text reads "local\_shop | mercanet\_currency\_code" and "Currency code".
- Processor type**: A dropdown menu currently set to "32 bits". Below it, the text reads "local\_shop | mercanet\_processor\_type" and "Determines API Processor type to be used (Linux versions)".

### Ogone configuration option

Ogone (now Ingénico), is a multi-bank payment intermediary that can centralise payments received via a unique interface for several different banking systems.

The screenshot shows a configuration form titled "Ogone/Ingenico configuration options". It contains the following fields:

- Ogone/Ingenico Merchant Identifier**: A text input field. Below it, the text reads "local\_shop | ogone\_pid", "Default: Empty", and "Ogone/Ingenico Merchant Identifier".
- Secret glue for gateway input**: A text input field. Below it, the text reads "local\_shop | ogone\_secret\_in", "Default: Empty", and "This glue is used to secure the transfer of your merchant data to the ogone gateway. It needs to be identical to the secret you have setup in the ogone account backoffice."
- Secret glue for gateway output**: A text input field. Below it, the text reads "local\_shop | ogone\_secret\_out", "Default: Empty", and "This glue is used to check the answers of the ogone gateway. It needs to be identical to the secret you have setup in the ogone account backoffice."
- Multiple Shop diverter info**: A text input field. Below it, the text reads "local\_shop | ogone\_paramvar", "Default: Empty", and "This is to be used in case you have multiple shops hosted on the same facility (See Ingenico/Ogone Integration Documentation)".
- Logo URL**: A text input field. Below it, the text reads "local\_shop | ogone\_logourl", "Default: Empty", and "An URL to your logo for the remote payment page. (must be an HTTPS url as ogone payment service is secured)".

### Paypal

When using test mode, you will send all purchases to the Paypal sandbox. Paypal sandbox do NOT

automate the IPN process (asynchronous return to merchant site) and you will have to simulate it using the Paypal IPN Simulator. The IPN end point of this site is : [http://ma.formation-enligne.com/local/shop/paymodes/paypal/paypal\\_ipn.php](http://ma.formation-enligne.com/local/shop/paymodes/paypal/paypal_ipn.php).

### Paypal configuration options

When using test mode, you will send all purchases to the Paypal sandbox. Paypal sandbox do NOT automate the IPN process (asynchronous return to merchant site) and you will have to simulate it using the Paypal IPN Simulator. The IPN end point of this site is : [http://ma.formation-enligne.com/local/shop/paymodes/paypal/paypal\\_ipn.php](http://ma.formation-enligne.com/local/shop/paymodes/paypal/paypal_ipn.php).

Paypal seller test account (paypal sandbox) <small>local_shop   paypal_seller_test_account</small>	<input type="text" value="vent@activeprolearn.com"/>	Default: Empty The account id of the reseller
Sales Service (test mode) <small>local_shop   paypal_seller_test_service</small>	<input type="text" value="Sandbox Paypal APL"/>	Default: Empty An arbitrary label that allows sorting transactions against multiple selling services
Paypal seller account <small>local_shop   paypal_seller_account</small>	<input type="text" value="vent@activeprolearn.com"/>	Default: Empty The account id of the reseller
Sales Service <small>local_shop   paypal_seller_service</small>	<input type="text" value="Ventes Paypal APL"/>	Default: Empty An arbitrary label that allows sorting transactions against multiple selling services

## System Pay PLUS

System Pay PLUS, developed by ATOS, is the payment system used by Caisse d'Epargne, the Banques Populaires, and banks in that group.

### System Pay PLUS Settings

Service URL <small>local_shop   systempay_service_url</small>	<input type="text" value="https://payzen.societegenerale.eu"/>	Default: Empty Url for Payment Transaction Server
Merchant ID <small>local_shop   systempay_merchant_id</small>	<input type="text" value="9522"/>	Default: Empty This is the ID of the merchant service provided in your backoffice interface
Test certificate <small>local_shop   systempay_test_certificate</small>	<input type="text" value="32411"/>	Default: Empty The certificate key to encode test submissions
Prod certificate <small>local_shop   systempay_prod_certificate</small>	<input type="text" value="7916999506"/>	Default: Empty The certificate key to encode production submissions
Use 3D Secure service <small>local_shop   systempay_use_3dsecure</small>	<input checked="" type="checkbox"/>	Default: No 3D Secure is an option to the merchant payment contract that will callback the customer for a confirmation code.
Bank brand <small>local_shop   systempay_bank</small>	<input type="text" value="Payzen / Société Générale"/>	Default: Caisse d'Epargne
Country <small>local_shop   systempay_country</small>	<input type="text" value="France"/>	Country
Currency Code <small>local_shop   systempay_currency_code</small>	<input type="text" value="Euro"/>	Currency Code
Use local time <small>local_shop   systempay_use_localtime</small>	<input checked="" type="checkbox"/>	Default: Yes Use local time for transactions, or UTC/GMT time if not checked.

## Notifications

- **Pre sales notifications** : Enable or disable the order input notification.

### Notifications

---

Pre sales notifications

local\_shop | presalenotification Default: Yes

Enable or disable the order input notification

## Reseller banking information

### Introduction

The vendor's banking information is used for offline payment procedures to provide bank details for interbank transfers or for issuing cheques. This information is found in your bank documentation.

- Bank name :Bank company name
- Bank code :Bank code of the merchant
- Bank office: Agency code
- Bank Account : Agency code
- Bank account key :Account key of the merchant
- IBAN : The IBAN number of the merchant
- BIC : BIC identification code of the merchant's bank
- VAT European Intracommunautary:European VAT number



## Reseller banking information

Banking <small>local_shop   banking</small>	<input type="text" value="SOCIE [REDACTED] RALE"/>
	Default: Empty Bank company name
Bank code <small>local_shop   bankcode</small>	<input type="text" value="300 [REDACTED]"/>
	Default: Empty Bank code of the merchant
Bank Office <small>local_shop   bankoffice</small>	<input type="text" value="01 [REDACTED]"/>
	Default: Empty Agency code
Bank Account <small>local_shop   bankaccount</small>	<input type="text" value="00027004001"/>
	Default: Empty Agency code
Bank Account Key <small>local_shop   bankaccountkey</small>	<input type="text" value="9 [REDACTED]"/>
	Default: Empty Account key of the merchant
IBAN <small>local_shop   iban</small>	<input type="text" value="FR [REDACTED] 195"/>
	Default: Empty The IBAN number of the merchant
BIC <small>local_shop   bic</small>	<input type="text" value="SO [REDACTED] PP"/>
	Default: Empty BIC identification code of the merchant's bank
VAT European Intracommunautary <small>local_shop   tvaeurope</small>	<input type="text"/>
	Default: Empty European VAT number

## Apparence

### Introduction

Cette section permet de gérer l'apparence des produits en front-office



## Appearance

Thumb height <small>local_shop   productimageheight</small>	<input type="text" value="150"/>
	Default: 150 Product thumb height (px)
Thumb width <small>local_shop   productimagewidth</small>	<input type="text" value="150"/>
	Default: 150 Product thumb width (px)
Thumb right margin <small>local_shop   productimagemargin</small>	<input type="text" value="40"/>
	Default: 40 Product thumb right margin (px)
Element thumb height <small>local_shop   elementimageheight</small>	<input type="text" value="80"/>
	Default: 80 Product subelement thumb height (px)
Element thumb width <small>local_shop   elementimagewidth</small>	<input type="text" value="80"/>
	Default: 80 Product subelement thumb width (px)
Element thumb right margin <small>local_shop   elementimagemargin</small>	<input type="text" value="25"/>
	Default: 25 Product subelement thumb right margin (px)

## Experimental

These features are enabled but still subject to change.

- **Use shipping** : Default: No: If enabled, delivery charges are handled.
- **Use sales delegation**: Default: No: If enabled, users can own products and sell them on their own behalf : The Moodle shop is also designed to be a marketplace for course authors. This feature will only be available in the extended version of the shop (PRO). The sales delegation provides that the catalogue products can belong to delegate seller accounts (generally associated with the course author) so that the platform can manage sales on behalf of the author. Representatives will have access to a portion of the back office in order to monitor sales management.
- **Use master/slave catalogues**: Default: No. If enabled, master/slave catalogues are handled.
- **Use renewable products**: Default: No: If enabled, renewable products are handled.

### Experimental features

- Uses shipping  
local\_shop | useinshipping  
Default: No  
Enables the shipping costs engine
- Use sales delegation  
local\_shop | usedelegation  
Default: No  
If enabled, some users may get ownership of products and sales in the shop.
- Uses master/slave catalogs  
local\_shop | useslavecatalogs  
Default: No  
Uses master/slave catalogs
- Uses renewable products  
local\_shop | userenewableproducts  
Default: No  
Uses renewable products

### Plugin distribution

- Emulate community version  
report\_trainingissions | emulatecommunity  
Default: No  
If enabled, the plugin will behave as the public community version. This might loose features !

## Credits

- Valéry Frémaux (valery@activeprolearn.com) Conception - Developments - Documentation
- Florence Labord (florence@activeprolearn.com) Revue Fonctionnelle - Tests - Documentation

[back to local shop composant](#) - [Back to catalogue](#)

From: <https://docsen.activeprolearn.com/> - Moodle ActiveProLearn Documentation

Permanent link: <https://docsen.activeprolearn.com/doku.php?id=local:shop:globalconfig&rev=1526055631>

Last update: 2024/04/04 15:50

